

# Micro Line

**MLH-200**

2 x HDMI to IP



Leading the signal  
all over the world



[www.lemco.gr](http://www.lemco.gr)




# Micro Line

The MLH-200 is a very powerful, all-in-one mini headend device, able to receive up to two (2) HD signals and convert them in IPTV streaming using UDP/RTP protocols multicast/unicast.

It supports "pool" technology, meaning that the user is able to select any program from any of the two (2) inputs and assign them to any of the two (2) IP outputs providing great flexibility.

The embedded web server of the MLH-200 provides a very friendly user interface as well as the ability of remote or local control of the device via LAN.

Its small size and its powerful features render the MLH-200 the ideal solution in case we want to distribute HD content eg. coming from STBs or blue ray using IPTV technology.

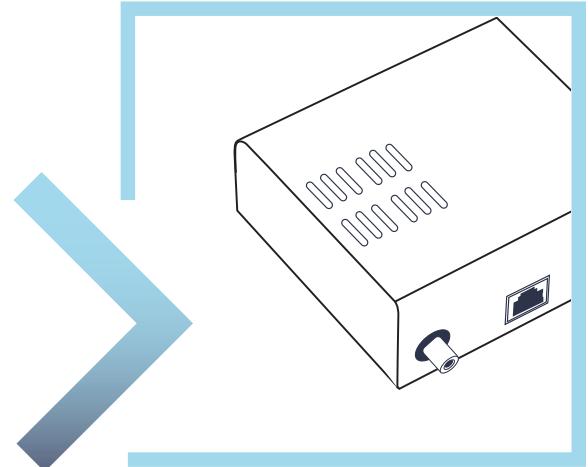

## Features

- 2 x HD inputs
- HDCP v1.4 support
- Gbit IP streaming (up to 64 x SPTS / 4 x MPTS)
- "Pool" technology
- Dual power supplies offering redundancy mode
- Local or remote control via webserver
- Very friendly user interface
- Wall or rack mount options
- Ultra-compact size
- 5-year warranty



## 2 x HDMI to IP

# MLH-200

### Technical Specifications

#### Input Specifications

##### HD Input

Type	2 x HD inputs
Video coding	MPEG-4 AVC / H.264
Profile	High profile 4.0
Input resolution	Up to 1920 x 1080 - 50/60 p & i
Output resolution	Up to 1920 x 1080 - 30p
HDCP support	Yes, v1.4

##### Audio

Audio	HD
Standard	MPEG-1 Layer II
Audio Bit Rate	64, 96, 128, 192, 256, 320 Kbps
Format	MPEG2, AAC, AC3

##### H.264 encoder

Standard	MPEG-4 AVC / H.264
Bit Rate	1 – 19 Mbps adjustable
Configurable Parameters	Service Name, Service ID
LCN processing	Yes

#### Output Specifications

##### Transport Stream Processing

Services	User selection by service names
Automatic Regeneration	PAT, CAT, SDT, PMTs, EITs tables
NIT/SDT	Pass-through, Custom, Automatic
PCR	re-stamping

##### LCN support

LCN support	Yes
-------------	-----



#### IP Streaming

IP TS Out	Yes
Protocol	UDP / RTP (Multicast/Unicast)
Speed	1Gbit (480 Mbps in IP only mode)
IGMP support	Yes, v2, v3
Type	MPTS (up to 4 TS) SPTS (up to 4 HD programs)
Max. Bitrate	480Mbps max.

#### Programming Interface

Ethernet webserver	Yes, embedded webserver
Speed	10/100 Mbps
Connector	RJ45
Browser compatibility	Chrome, Firefox, Safari, Opera, Edge etc. (Must support HTML v5.0)

#### EAN-13

Code	5213009760126
------	---------------

#### General

Power Supply	2 x +12VDC
Power supply consumption	2A max.
Operating Temperature	0 °C to 40 °C
Storage Temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	235 x 115 x 48 mm
Weight	0.45 Kg

[www.lemco.gr](http://www.lemco.gr)



Latheas 46 - 13678 Athens - Greece

📞 +30 210 2811401, +30 210 2405237 📲 +30 210 2825755 📩 info@lemco.gr

follow us: [f](#) @Lemco [t](#) @Lemcodtv [in](#) /company.lemco